



**GROWER**®




*Reliable agricultural machinery*

# Catalog




## Highlighted Features of **GROWER®** Tractors

All **GROWER®** tractor models can be equipped with a high-performance rear hitch, offering high power output for a wide range of agricultural applications. The cabin is spacious and well equipped, featuring excellent visibility, intuitive controls, and a comfortable seat that enhances ergonomics when connecting implements or tillage tools.

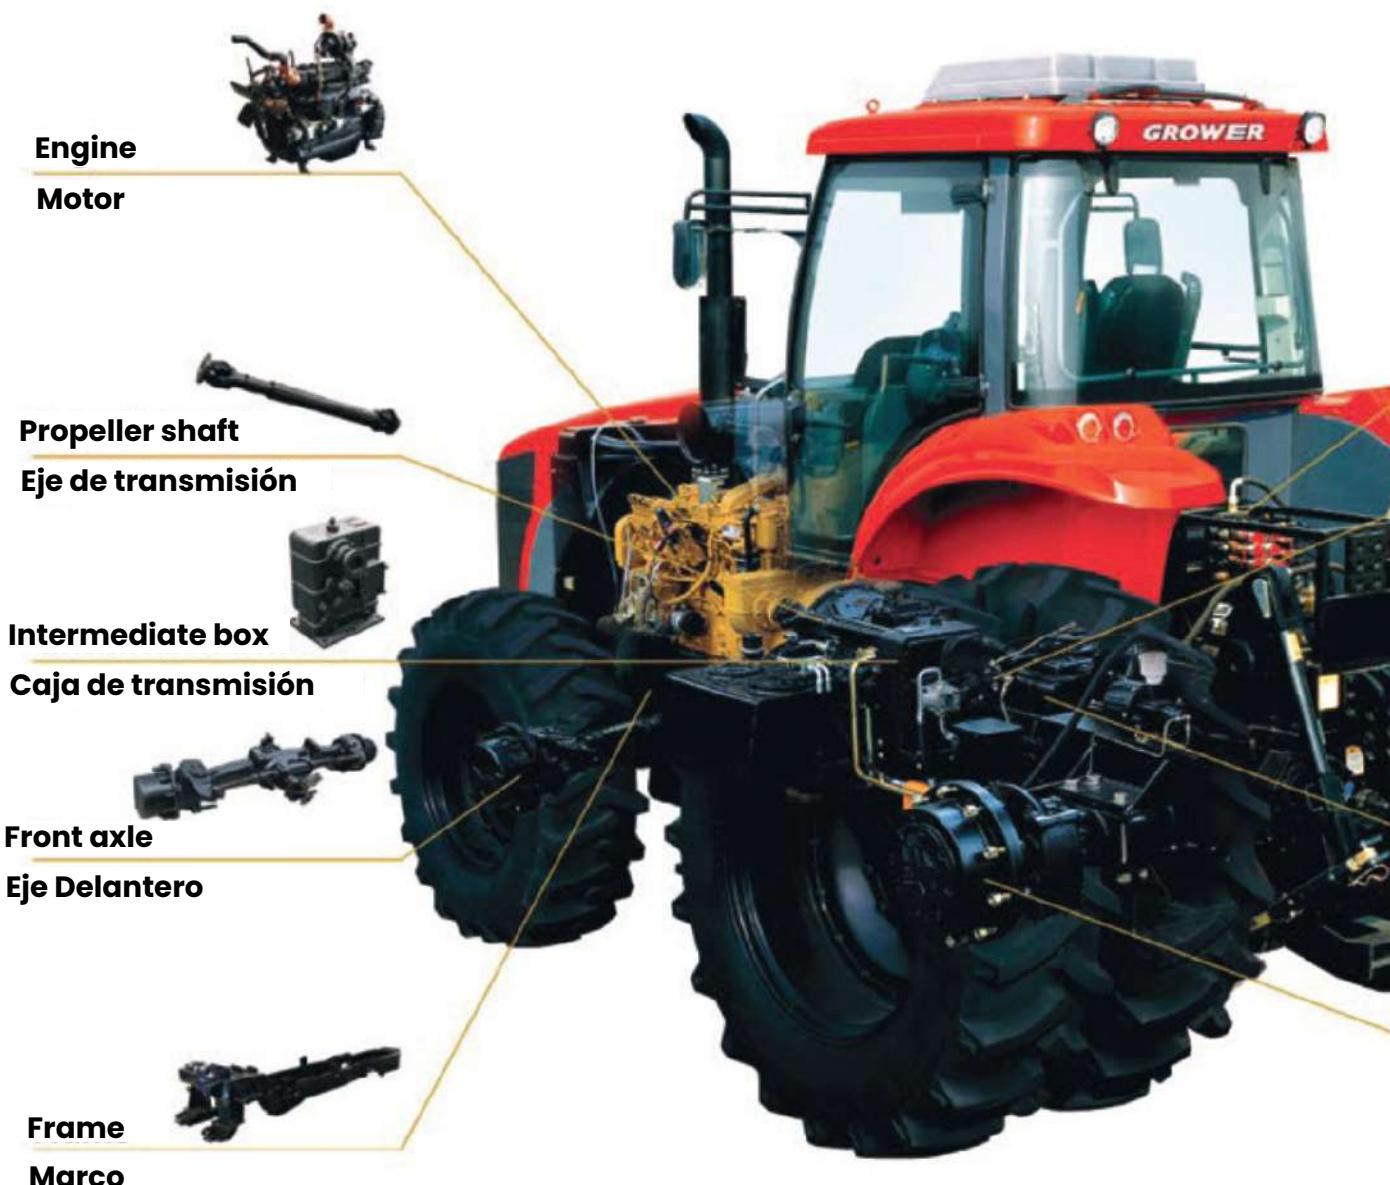

*\*Equipment features, images, and specifications are subject to change without notice by **GROWER®***

For seeding operations, mixing tasks, hay baling, or any other agricultural application, the PTO (power take-off) of **GROWER®** tractors responds effectively to any operational need, ensuring optimal performance. Additionally, the high-tech engine provides cleaner and quieter operation without compromising the superior performance and durability that characterize these tractors.

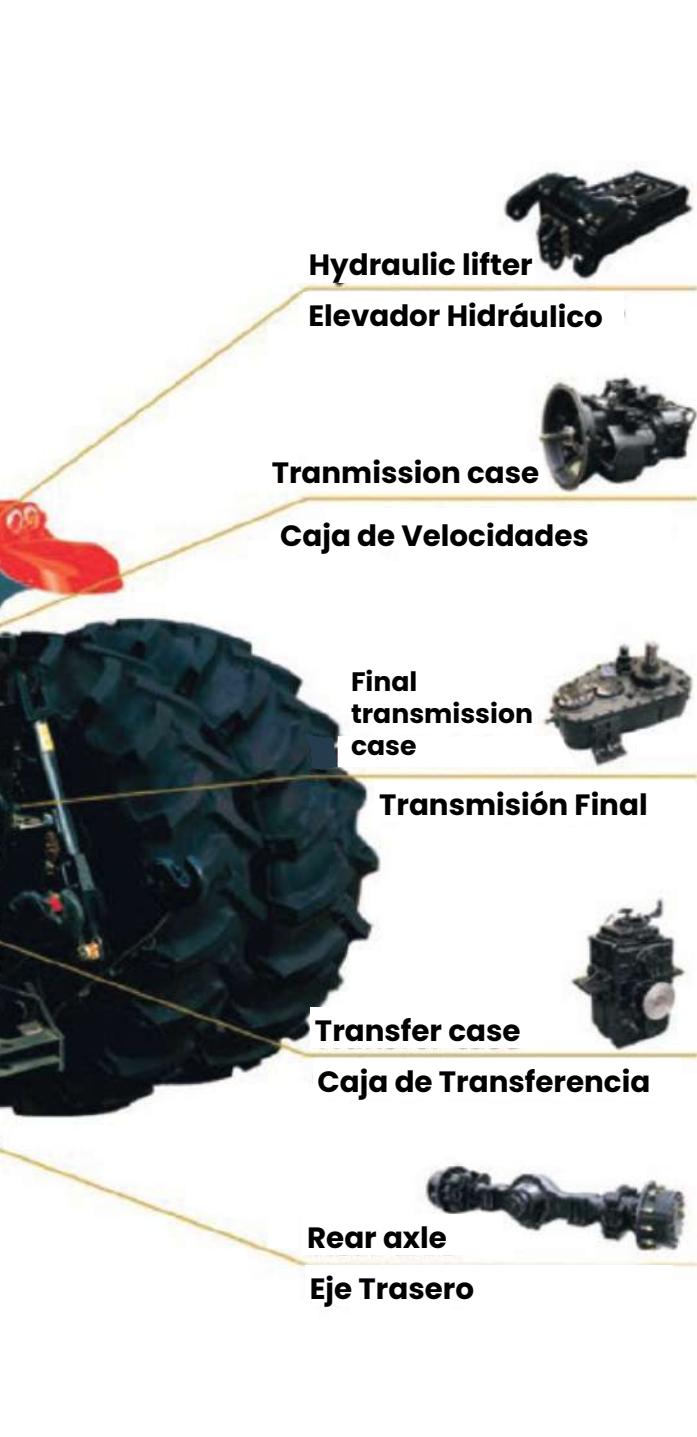

**Rear Hitch / Enganche trasero**



**Tractor cabin / Cabina del tractor**



**PTO of GROWER Tractors**



**Engine / Motor GROWER**

**Grower**®

**GROWER**®



**Range 25-50 HP**

\*Equipment features, images, and specifications are subject to change without notice by **GROWER**®

## Technical Info

Transmission	GT 254	GT 354
Drive type	4WD / 4x4	4WD / 4x4
Gearbox gears number	F8+R2	F8+R2
Max. forward speed (km/h) / (mph)	27.2 / 16.9	27.2 / 16.9
Engine		
Engine brand	GROWER	GROWER
Engine model	GE-LD254	GE-LD354
Engine type	Inline, 4-stroke, water-cooled, Natural aspirated, 4 cylinders	
Engine Rated power (kW) / (hp)	18.4 / 24.6	25.8 / 34.5
Engine Rated speed (rpm)	2350	2400
Engine Displacement (L) / (cc)	1.60 / 1600	2.24 / 2240
Cylinder Bore (mm) / (in)	82 / 2.23	88 / 3.46
Piston Stroke (mm) / (in)	76 / 2.99	92 / 3.62
Fuel tank capacity (L) / (gal)	40 / 10.6	40 / 10.6
Traction & Force		
Max. traction force (kN / lbf)	18,85 / 4237,65	18,85 / 4237,65
Max. lifting force (kg / lb)	725 / 1600	725 / 1600
PTO ( Power Take - Off )		
PTO power (kW / hp)	34.38 / 46.1	34.38 / 46.1
PTO type	Rear-mounted, independent	Rear-mounted, independent
PTO speed (rpm)	540/760 or 540/1000	540/760 or 540/1000
PTO shaft size	8 splines, 6-spline optional	8 splines, 6-spline optional
Hydraulic System		
Number of hydraulic outlets	Two pairs	Two pairs
Draft control	Height control and float control	Height control and float control
Dimensions & Weights		
Dimensions L xW xH (height to top of safety frame) (mm) / (in)	3,350 x 1,500 x 1,860 / 131 x 59 x 73	3,350 x 1,500 x 1,860 / 131 x 59 x 73
Wheelbase (mm) / (in)	1,730 / 68	1,730 / 68
Front track (mm) / (in)	960 - 1,200 / 37 - 47	970 - 1,300 / 37 - 41
Rear track width (mm) / (in)	960 - 1,300 / 37 - 51	1,000 - 1,400 / 37 - 55
Min. ground clearance (mm) / (in)	320 / 12	330 / 12
Minimum operating weight with cab (kg) / (lb)	1,250 / 2,755	1,250 / 2,755
Steering & Hitch		
Steering type	Full hydraulic steering	
Hitch type / category	Rear-mounted three-point hitch, Category I and II	
Tires		
Front tire specification	6.50-16	6.50-16
Rear tire specification	9.5-24	9.5-24
Optional Configuration		
Front ballast (kg) / (lb)	Max. 112 / 246.92 (optional)	
Rear ballast (kg) / (lb)	Max. 200 / 440.92 (optional)	
Cab with A/C, 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires 12.4x20 / 16.9x28 - 9.5x24 / 16.9x28 SET		

## Technical Info

Transmission	GT 454	GT 504
Drive type	4WD / 4x4	4WD / 4x4
Gearbox gears number	F8+R2	F8+R2
Max. forward speed (km/h) / (mph)	27.2 / 16.9	27.2 / 16.9
Engine		
Engine brand	GROWER	GROWER
Engine model	GE-LD454	GE-LD504
Engine type	Inline, 4-stroke, water-cooled, Natural aspirated, 4 cylinders	Inline, 4-stroke, water-cooled, direct injection, turbocharged, intercooled, 4 cylinders
Engine Rated power (kW) / (hp)	33.1 / 44.4	36.8 / 49.3
Engine Rated speed (rpm)	2400	2400
Engine Displacement (L) / (cc)	2.55 / 2550	2.9 / 2900
Cylinder Bore (mm) / (in)	90 / 3.54	90 / 3.54
Piston Stroke (mm) / (in)	100 / 3.93	105 / 4.13
Fuel tank capacity (L) / (gal)	55 / 14.5	55 / 14.5
Traction & Force		
Max. traction force (kN / lbf)	18,85 / 4237,65	18,85 / 4237,65
Max. lifting force (kg / lb)	725 / 1600	725 / 1600
PTO ( Power Take - Off )		
PTO power (kW / hp)	34.38 / 46.1	34.38 / 46.1
PTO type	Rear-mounted, independent	Rear-mounted, independent
PTO speed (rpm)	540/760 or 540/1000	540/760 or 540/1000
PTO shaft size	8 splines, 6-spline optional	8 splines, 6-spline optional
Hydraulic System		
Number of hydraulic outlets	Two pairs	Two pairs
Draft control	Height control and float control	Height control and float control
Dimensions & Weights		
Dimensions L xW xH (height to top of safety frame) (mm) / (in)	3,350 x 1,500 x 1,860 / 131 x 59 x 73	3790 x 1620 x 2130 / 149 x 63 x 83
Wheelbase (mm) / (in)	1,730 / 68	2,035 / 80
Front track (mm) / (in)	970 – 1,300 / 37 – 41	1,300 / 49
Rear track width (mm) / (in)	1,000 – 1,400 / 37 – 55	1,300 – 1,500 / 49 – 59
Min. ground clearance (mm) / (in)	320 / 12	354 / 13.9
Minimum operating weight with cab (kg) / (lb)	1,380 / 3,042	2,120 / 4,673
Steering & Hitch		
Steering type	Full hydraulic steering	
Hitch type / category	Rear-mounted three-point hitch, Category I and II	
Tires		
Front tire specification	6.50-16	6.50-16
Rear tire specification	9.5-24	11.2-24
Optional Configuration		
Front ballast (kg) / (lb)	Max. 112 / 246.92 (optional)	
Rear ballast (kg) / (lb)	Max. 200 / 440.92 (optional)	

Cab with A/C, 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires 12.4x20 / 16.9x28 – 9.5x24 / 16.9x28 SET



**GROWER**®



**Legal Notice:**

The information contained in this catalog, including but not limited to technical specifications, descriptions, configurations, illustrations, images, performance data, capacities, and any other information, is provided for informational and reference purposes only. Such information may be modified, updated, or corrected at any time without prior notice.

**GROWER®** assumes no responsibility for any errors, omissions, or discrepancies between the information contained herein and the final product delivered.



*\*Equipment features, images, and specifications are subject to change without notice by **GROWER®***

**Grower**®

**GROWER**®



# Range 55-80 HP

\*Equipment features, images, and specifications are subject to change without notice by **GROWER**®

## Technical Info

Transmission	GT 554	GT 604
Drive type	4WD / 4x4	4WD / 4x4
Gearbox gears number	8 + 2	FI2+RI2
Max. forward speed (km/h) / (mph)	27.2 / 16.9	32,06 / 19,92
Engine		
Engine brand	GROWER	GROWER
Engine model	GE-LD554	GT-4C6-60U32
Engine type	Inline, 4-stroke, water-cooled, direct injection, turbocharged, intercooled, 4 cylinders	
Engine Rated power (kW) / (hp)	40.5 / 54.3	44,1 / 59,14
Engine Rated speed (rpm)	2400	2400
Engine Displacement (L) / (cc)	3.3 / 3300	3.26 / 3260
Cylinder Bore (mm) / (in)	94 / 3.70	95 / 3.74
Piston Stroke (mm) / (in)	105 / 4.13	115 / 4.52
Fuel tank capacity (L) / (gal)	55 / 14.5	90 / 23,78
Traction & Force		
Max. traction force (kN / lbf)	18,85 / 4237,65	18,85 / 4237,65
Max. lifting force (kg / lb)	725 / 1600	9,92 / 2230,1
PTO ( Power Take - Off )		
PTO power (kW / hp)	34.38 / 46.1	37,5 / 50,29
PTO type	Rear-mounted, independent	Rear-mounted, independent
PTO speed (rpm)	540/760 or 540/1000	540/760 or 540/1000
PTO shaft size	8 splines, 6-spline optional	8 splines, 6-spline optional
Hydraulic System		
Number of hydraulic outlets	Two pairs	Two pairs
Draft control	Height control and float control	Height control and float control
Dimensions & Weights		
Dimensions L xW xH (height to top of safety frame) (mm) / (in)	3790 x 1620 x 2130 / 149 x 63 x 83	3925x1728x2870 / 154x68x113
Wheelbase (mm) / (in)	2035 / 80	2010 / 79
Front track (mm) / (in)	1265 / 50	1265 / 50
Rear track width (mm) / (in)	1300 – 1500 / 49 – 59	1220, 1320, 1420, 1520 / 48, 52, 56, 60
Min. ground clearance (mm) / (in)	354 / 13.9	360 / 14
Minimum operating weight with cab (kg) / (lb)	2120 / 4673	2565 / 5655
Steering & Hitch		
Steering type	Full hydraulic steering	
Hitch type / category	Rear-mounted three-point hitch, Category I and II	
Tires		
Front tire specification	7.50-16	8.3-24
Rear tire specification	11.2-28	11-32
Optional Configuration		
Front ballast (kg) / (lb)	Max. 112 / 246.92 (optional)	
Rear ballast (kg) / (lb)	Max. 200 / 440.92 (optional)	
Cab with A/C, 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires 12.4x20 / 16.9x28 – 9.5x24 / 16.9x28 SET		

## Technical Info

Transmission	GT 704	GT 804
Drive type	4WD / 4x4	4WD / 4x4
Gearbox gears number	F12+R12	F12+R12
Max. forward speed (km/h) / (mph)	31.44 / 19.35	30.96 / 19.24
Engine		
Engine brand	GROWER	GROWER
Engine model	GT-4D32ZT31/704	GT-4C6-80U32
Engine type	Inline, 4-stroke, water-cooled, direct injection, turbocharged, intercooled, 4 cylinders	
Engine Rated power (kW) / (hp)	51.5 / 69.06	59 / 79.12
Engine Rated speed (rpm)	2400	2400
Engine Displacement (L) / (cc)	3.567 / 3567	3.47 / 3470
Cylinder Bore (mm) / (in)	104 / 4.09	98 / 3.85
Piston Stroke (mm) / (in)	105 / 4.13	115 / 4.52
Fuel tank capacity (L) / (gal)	90 / 23.78	90 / 23.78
Traction & Force		
Max. traction force (kN / Lbf)	18,85 / 4237,65	19.992 / 4494.38
Max. lifting force (kg / lb)	12.36 / 2779.76	14.16 / 3183.29
PTO ( Power Take - Off )		
PTO power (kW / hp)	43.8 / 58.74	50.15 / 67.25
PTO type	Rear-mounted, independent	Rear-mounted, independent
PTO speed (rpm)	540/760 or 540/1000	540/760 or 540/1000
PTO shaft size	8 splines, 6-spline optional	8 splines, 6-spline optional
Hydraulic System		
Number of hydraulic outlets	Two pairs	Two pairs
Draft control	Height control and float control	Height control and float control
Dimensions & Weights		
Dimensions L xW xH (height to top of safety frame) (mm) / (in)	3925x1728x2870 / 154x68x113	4530 x 2050 x 2930 / 178 x 80 x 115
Wheelbase (mm) / (in)	2010 / 79	2030 / 80
Front track (mm) / (in)	1265 / 50	1265 / 50
Rear track width (mm) / (in)	1220, 1320, 1420, 1520 / 48, 52, 56, 60	1350, 1450, 1550 / 53, 57, 61
Min. ground clearance (mm) / (in)	360 / 14	370 / 15
Minimum operating weight with cab (kg) / (lb)	2565 / 5655	2720 / 5997
Steering & Hitch		
Steering type	Full hydraulic steering	Full hydraulic steering on front wheels
Hitch type / category	Rear-mounted three-point hitch, Category I and II	
Tires		
Front tire specification	8.3-24	8.3-24
Rear tire specification	11-32	11-32
Optional Configuration		
Front ballast (kg) / (lb)	Max. 112 / 246.92 (optional)	
Rear ballast (kg) / (lb)	Max. 200 / 440.92 (optional)	

**GT 704** - Cab with A/C, 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires 12.4x20 / 16.9x28 - 9.5x24 / 16.9x28 SET

**GT 804** - Cab with A/C, 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires 12.4x24 / 18.4x30



**GROWER**®



**Legal Notice:**

The information contained in this catalog, including but not limited to technical specifications, descriptions, configurations, illustrations, images, performance data, capacities, and any other information, is provided for informational and reference purposes only. Such information may be modified, updated, or corrected at any time without prior notice.

**GROWER**® assumes no responsibility for any errors, omissions, or discrepancies between the information contained herein and the final product delivered.



*\*Equipment features, images, and specifications are subject to change without notice by **GROWER**®*

**Grower**®

**GROWER**®



# Range 90-120 HP

\*Equipment features, images, and specifications are subject to change without notice by **GROWER**®

## Technical Info

Transmission	GT 904	GT 1004
Drive type	4WD / 4x4	4WD / 4x4
Gearbox gears number	F12+R12	F12+R12
Max. forward speed (km/h) / (mph)	32.26 / 20.05	32.26 / 20.11
Engine		
Engine brand	GROWER	GROWER
Engine model	GT-4C6-90C31	GT-4C6-100C35
Engine type	Inline, 4-stroke, water-cooled, direct injection, turbocharged, intercooled, 4 cylinders	
Engine Rated power (kW) / (hp)	66.2 / 88.78	73.5 / 98.57
Engine Rated speed (rpm)	2400	2400
Engine Displacement (L) / (cc)	3.47 / 3.470	3.47 / 3470
Cylinder Bore (mm) / (in)	98 / 3.86	98 / 3.85
Piston Stroke (mm) / (in)	115 / 4.53	115 / 4.52
Fuel tank capacity (L) / (gal)	90 / 23,78	90 / 23,78
Traction & Force		
Max. traction force (kN / lbf)	20.727 / 4659.61	23.8875 / 5370.12
Max. lifting force (kg / lb)	15.88 / 3569.97	17.64 / 3965.63
PTO ( Power Take - Off )		
PTO power (kW / hp)	56.27 / 75.46	62.5 / 83.81
PTO type	Rear-mounted, independent	Rear-mounted, independent
PTO speed (rpm)	540/760 or 540/1000	540/760 or 540/1000
PTO shaft size	8 splines, 6-spline optional	8 splines, 6-spline optional
Hydraulic System		
Number of hydraulic outlets	Two pairs	Two pairs
Draft control	Height control and float control	Height control and float control
Dimensions & Weights		
Dimensions L xW xH (height to top of safety frame) (mm) / (in)	4530 x 2050 x 2930 / 178 x 80 x 115	4530 x 2050 x 2930 / 178 x 80 x 115
Wheelbase (mm) / (in)	2080 / 82	2115 / 83
Front track (mm) / (in)	1285 / 51	1300 / 51
Rear track width (mm) / (in)	1350, 1450, 1550 / 53, 57, 61	1300-1600 / 51-62.9
Min. ground clearance (mm) / (in)	370 / 15	410 / 16.1
Minimum operating weight with cab (kg) / (lb)	2820 / 6217	3250 / 7165
Steering & Hitch		
Steering type	Full hydraulic steering on front wheels	
Hitch type / category	Rear-mounted three-point hitch, Category I and II	
Tires		
Front tire specification	8.3-24	9.5-24
Rear tire specification	14.9-30	14.9-30
Optional Configuration		
Front ballast (kg) / (lb)	Max. 112 / 246.92 (optional)	
Rear ballast (kg) / (lb)	Max. 200 / 440.92 (optional)	

**GT 904** - Cab with A/C, 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires 12.4x24 / 18.4x30

**GT 1004** - Cab with A/C, 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires 12.4x24 / 18.4x34 - 14.9x24 / 23.1x26

## Technical Info

Transmission	GT 1104	GT 1204
Drive type	4WD / 4x4	4WD / 4x4
Gearbox gears number	F12+R12	F12+R12
Max. forward speed (km/h) / (mph)	32.26 / 20.11	32.26 / 20.11
Engine		
Engine brand	GROWER	GROWER
Engine model	GT-4C6-100C35	GT-4C6-120C32
Engine type	Inline, 4-stroke, water-cooled, direct injection, turbocharged, intercooled, 4 cylinders	
Engine Rated power (kW) / (hp)	81 / 108	88.3 / 118.41
Engine Rated speed (rpm)	2400	2400
Engine Displacement (L) / (cc)	3.47 / 3.470	3.47 / 3470
Cylinder Bore (mm) / (in)	98 / 3.86	98 / 3.86
Piston Stroke (mm) / (in)	115 / 4.53	115 / 4.53
Fuel tank capacity (L) / (gal)	90 / 23,78	200 / 52.83
Traction & Force		
Max. traction force (kN / lbf)	23.8875 / 5370.12	28.371 / 6378.05
Max. lifting force (kg / lb)	17.64 / 3965.63	21.192 / 4764.15
PTO ( Power Take - Off )		
PTO power (kW / hp)	62.5 / 83.81	75 / 100.58
PTO type	Rear-mounted, independent	Rear-mounted, independent
PTO speed (rpm)	540/760 or 540/1000	540/760 or 540/1000
PTO shaft size	8 splines, 6-spline optional	8 splines, 6-spline optional
Hydraulic System		
Number of hydraulic outlets	Two pairs	Two pairs
Draft control	Height control and float control	Height control and float control
Dimensions & Weights		
Dimensions L xW xH (height to top of safety frame) (mm) / (in)	4530 x 2050 x 2930 / 178 x 80 x 115	4530 x 2050 x 2930 / 178 x 80 x 115
Wheelbase (mm) / (in)	2115 / 83	2070 / 82
Front track (mm) / (in)	1353 / 53	1288-1493 / 51-59
Rear track width (mm) / (in)	1352-1672 / 53-66	1352-1672 / 53-66
Min. ground clearance (mm) / (in)	400 / 15.75	400 / 15.75
Minimum operating weight with cab (kg) / (lb)	3250 / 7165	3860 / 8510
Steering & Hitch		
Steering type	Full hydraulic steering on front wheels	
Hitch type / category	Rear-mounted three-point hitch, Category I and II	
Tires		
Front tire specification	9.5-24	9.5-24
Rear tire specification	14.9-30	14.9-30
Optional Configuration		
Front ballast (kg) / (lb)	Max. 112 / 246.92 (optional)	
Rear ballast (kg) / (lb)	Max. 200 / 440.92 (optional)	

**GT 1104** - Cab with A/C, 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires 12.4x24 / 18.4x34 - 14.9x24 / 23.1x26

**GT 1204** - Cab with A/C, 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires 14.9x24/23.1x26 - 14.9x24/23.1x30



**GROWER**®



**Legal Notice:**

The information contained in this catalog, including but not limited to technical specifications, descriptions, configurations, illustrations, images, performance data, capacities, and any other information, is provided for informational and reference purposes only. Such information may be modified, updated, or corrected at any time without prior notice.

**GROWER®** assumes no responsibility for any errors, omissions, or discrepancies between the information contained herein and the final product delivered.



*\*Equipment features, images, and specifications are subject to change without notice by **GROWER®***



**GROWER**®



# Range 130-160 HP

\*Equipment features, images, and specifications are subject to change without notice by **GROWER**®

## Technical Info

Transmission	GT 1304	GT 1404
Drive type	4WD / 4x4	4WD / 4x4
Gearbox gears number	F12+R12	F24 + R8
Max. forward speed (km/h) / (mph)	38 / 24	38 / 24
Engine		
Engine brand	GROWER	GROWER
Engine model	GE-LD254	GT-LR6A3LR22/1030
Engine type	Inline, 4-stroke, water-cooled, direct injection, turbocharged, intercooled, 4 cylinders	6-cylinder inline, water-cooled, four-stroke, direct injection, turbocharged, intercooler
Engine Rated power (kW) / (hp)	95.6 / 128	103 / 138.13
Engine Rated speed (rpm)	2400	2300
Engine Displacement (L) / (cc)	4.4 / 4400	6.50 / 6,500
Cylinder Bore (mm) / (in)	105 / 4.13	105 / 4.13
Piston Stroke (mm) / (in)	127 / 5.00	125 / 4.92
Fuel tank capacity (L) / (gal)	130 / 34.3	210 / 55
Traction & Force		
Max. traction force (kN / lbf)	28.371 / 6378.05	35.6475 / 8014
Max. lifting force (kg / lb)	21.192 / 4764.15	24.72 / 5,557.28
PTO ( Power Take - Off )		
PTO power (kW / hp)	75 / 100.58	87.55 / 117.41
PTO type	Rear-mounted, independent	Rear-mounted, independent
PTO speed (rpm)	540/760 or 540/1000	540/760 or 540/1000
PTO shaft size	8 splines, 6-spline optional	8 splines, 6-spline optional
Hydraulic System		
Number of hydraulic outlets	Two pairs	Two pairs
Draft control	Height control and float control	Height control and float control
Dimensions & Weights		
Dimensions L xW xH (height to top of safety frame) (mm) / (in)	5,060 x 2,330 x 2,983 / 199 x 91 x 117	4740 x 2170 x 2990 / 187 x 85 x 118
Wheelbase (mm) / (in)	2,582 / 101.6	2445 / 96
Front track (mm) / (in)	1,784 - 2,202 / 70 - 86	1610/64 - 1750/69 - 1810 / 71 - 1850 / 73
Rear track width (mm) / (in)	1,650 - 2,285 / 64 - 89	1610/64 - 1750/67 - 1804 / 71 - 1900 / 75
Min. ground clearance (mm) / (in)	480 / 18.8	420 / 16.5
Minimum operating weight with cab (kg) / (lb)	5,510 / 12,147	4850 / 10,692
Steering & Hitch		
Steering type	Full hydraulic steering on front wheels	
Hitch type / category	Rear-mounted three-point hitch, Category I and II	
Tires		
Front tire specification	9.5-24	13.6-24
Rear tire specification	14.9-30	16.9-34
Optional Configuration		
Front ballast (kg) / (lb)	Max. 112 / 246.92 (optional)	Max. 400 / 881.85 (optional)
Rear ballast (kg) / (lb)	Max. 200 / 440.92 (optional)	Max. 320 / 705.48 (optional)

**GT 1304** - Cab with A/C, 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires 14.9x24/23.1x26 - 14.9x24/23.1x30

**GT 1404** - With 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires: (14.9x28/23.1x30)

## Technical Info

Transmission	GT 1504	GT 1604
Drive type	4WD / 4x4	4WD / 4x4
Gearbox gears number	F24 + R8	F24 + R8
Max. forward speed (km/h) / (mph)	38 / 24	38 / 24
Engine		
Engine brand	GROWER	GROWER
Engine model	GE-LDI504	GT-LR6A3LR22/I177
Engine type	6-cylinder inline, water-cooled, four-stroke, direct injection, turbocharged, intercooler	
Engine Rated power (kW) / (hp)	110.3 / 148	117.7 / 157.84
Engine Rated speed (rpm)	2300	2200
Engine Displacement (L) / (cc)	6.75 / 6750	6.75 / 6750
Cylinder Bore (mm) / (in)	105 / 4.13	105 / 4.13
Piston Stroke (mm) / (in)	30 / 1.12	130 / 5.12
Fuel tank capacity (L) / (gal)	228 / 60.2	260 / 68.6
Traction & Force		
Max. traction force (kN / lbf)	35.6475 / 8014	38.514 / 8,658.29
Max. lifting force (kg / lb)	401/884	28.248 / 6,350.4
PTO ( Power Take - Off )		
PTO power (kW / hp)	87.55 / 117.41	100.045 / 134.16
PTO type	Rear-mounted, independent	Rear-mounted, independent
PTO speed (rpm)	760/850 or 540/1000	760/850 or 540/1000
PTO shaft size	8 splines, 6-spline optional	8 splines, 6-spline optional
Hydraulic System		
Number of hydraulic outlets	Two pairs	Two pairs
Draft control	Height control and float control	Height control and float control
Dimensions & Weights		
Dimensions L xW xH (height to top of safety frame) (mm) / (in)	5,060 x 2,345 x 2,940 / 199 x 92 x 115	5,060 x 2,345 x 2,940 / 199 x 92 x 115
Wheelbase (mm) / (in)	2,582 / 101.6	2,582 / 101.6
Front track (mm) / (in)	1,784 – 2,202 / 70 – 86	1,784 – 2,202 / 70 – 86
Rear track width (mm) / (in)	1,620 – 2,420 / 63 – 95	1,620 – 2,420 / 63 – 95
Min. ground clearance (mm) / (in)	480 / 18.8	480 / 18.8
Minimum operating weight with cab (kg) / (lb)	5,700 / 12,566	5,700 / 12,566
Steering & Hitch		
Steering type	Full hydraulic steering on front wheels	
Hitch type / category	Rear-mounted three-point hitch, Category I and II	
Tires		
Front tire specification	13.6-24	14.9-26
Rear tire specification	16.9-34	16.9-38
Optional Configuration		
Front ballast (kg) / (lb)	Max. 400 / 881.85 (optional)	
Rear ballast (kg) / (lb)	Max. 320 / 705.48 (optional)	

With 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires: (14.9x28/23.1x30)



**GROWER**®



**Legal Notice:**

The information contained in this catalog, including but not limited to technical specifications, descriptions, configurations, illustrations, images, performance data, capacities, and any other information, is provided for informational and reference purposes only. Such information may be modified, updated, or corrected at any time without prior notice.

**GROWER**® assumes no responsibility for any errors, omissions, or discrepancies between the information contained herein and the final product delivered.



*\*Equipment features, images, and specifications are subject to change without notice by **GROWER**®*

**Grower**®

**GROWER**®



# Range 180-220 HP

\*Equipment features, images, and specifications are subject to change without notice by **GROWER**®

## Technical Info

Transmission	GT 1804	GT 2004
Drive type	4WD / 4x4	4WD / 4x4
Gearbox gears number	F24 + R8	F24 + R8
Max. forward speed (km/h) / (mph)	38 / 24	38 / 24
Engine		
Engine brand	GROWER	GROWER
Engine model	GT-LR6M3LR22/1324	GT-WP6G200E330
Engine type	6-cylinder inline, water-cooled, four-stroke, direct injection, turbocharged, intercooler	
Engine Rated power (kW) / (hp)	132.4 / 177.55	147 / 197.13
Engine Rated speed (rpm)	2200	2200
Engine Displacement (L) / (cc)	6.75 / 6750	6.75 / 6750
Cylinder Bore (mm) / (in)	105 / 4.13	105 / 4.13
Piston Stroke (mm) / (in)	130 / 5.12	130 / 5.12
Fuel tank capacity (L) / (gal)	265 / 70	300 / 79
Traction & Force		
Max. traction force (kN / Lbf)	42.63 / 9,583.61	51.82 / 11,649.04
Max. lifting force (kg / lb)	31.776 / 7,143.53	35.28 / 7,931.26
PTO ( Power Take - Off )		
PTO power (kW / hp)	112.54 / 150.92	124.95 / 167.56
PTO type	Rear-mounted, independent	Rear-mounted, independent
PTO speed (rpm)	760/850 or 540/1000	760/850 or 540/1000
PTO shaft size	8 splines, 6-spline optional	21 involute splines
Hydraulic System		
Number of hydraulic outlets	Two pairs	Three pairs
Draft control	Height control and float control	Height control and float control
Dimensions & Weights		
Dimensions L xW xH (height to top of safety frame) (mm) / (in)	5,340 x 2,938 x 3,180 / 210 x 94 x 125	5685 x 2470 (2 rear tires) x 3220 / 224 x 97 x 127 5685 x 3465 (4 rear tires) x 3220 / 224 x 97 x 127
Wheelbase (mm) / (in)	2,758 / 108	2840 / 112
Front track (mm) / (in)	1,979 / 77 - 2,100 / 82	1780 / 70 - 1880 / 74 - 1970 / 78 - 2030 / 80
Rear track width (mm) / (in)	1,803 / 70 - 2,300 / 90	1800-2300 (2 rear tires) / 81-91 2330 (4 rear tires) / 92
Min. ground clearance (mm) / (in)	428 / 16	445 / 17.52
Minimum operating weight with cab (kg) / (lb)	6,600 / 14,550	7050 / 15,543 (2 rear tires) 7840 / 17,284 (4 rear tires)
Steering & Hitch		
Steering type	Full hydraulic steering on front wheels	
Hitch type / category	Rear-mounted three-point hitch, Category II and III	
Tires		
Front tire specification	14.9-26	14.9-26
Rear tire specification	16.9-38	20.8-38
Optional Configuration		
Front ballast (kg) / (lb)	Max. 600 / 1323 (optional)	Max. 600 / 1323 (optional)
Rear ballast (kg) / (lb)	Max. 360 / 793.66 (optional)	Max. 360 / 793.66 (optional)

**GT 1804** - With 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires: (14.9x28/23.1x30)

**GT 2004** - With front and rear iron ballast (1480 kg), optional tires: (16.9R28/20.8R38)

## Technical Info

Transmission	GT 2104	GT 2204
Drive type	4WD / 4x4	4WD / 4x4
Gearbox gears number	F24 + R8	F18 + R9
Max. forward speed (km/h) / (mph)	38 / 24	36 / 22.3
Engine		
Engine brand	GROWER	GROWER
Engine model	GE-LD2104	GT-SC7H220G3
Engine type	6-cylinder inline, water-cooled, four-stroke, direct injection, turbocharged, intercooler	
Engine Rated power (kW) / (hp)	154.4 / 207	162 / 217.25
Engine Rated speed (rpm)	2200	2200
Engine Displacement (L) / (cc)	6.75 / 6750	6.75 / 6750
Cylinder Bore (mm) / (in)	105 / 4.13	105 / 4.13
Piston Stroke (mm) / (in)	130 / 5.12	130 / 5.12
Fuel tank capacity (L) / (gal)	320 / 84.5	350 / 92.4
Traction & Force		
Max. traction force (kN / Lbf)	51.82 / 11,649.04	51.82 / 11,649.04
Max. lifting force (kg / lb)	35.28 / 7,931.26	38.88 / 8,740.57
PTO ( Power Take - Off )		
PTO power (kW / hp)	124.95 / 167.56	137.7 / 184.66
PTO type	Rear-mounted, independent	Rear-mounted, independent
PTO speed (rpm)	760/850 or 540/1000	760/850 or 540/1000
PTO shaft size	21 involute splines	21 involute splines
Hydraulic System		
Number of hydraulic outlets	Three pairs	Three pairs
Draft control	Height control and float control	Height control and float control
Dimensions & Weights		
Dimensions L xW xH (height to top of safety frame) (mm) / (in)	5,000 x 2,750 x 3,200 / 236 x 97 x 130	5685 x 2470 (2 rear tires) x 3220 / 224 x 97 x 127 5685 x 3465 (4 rear tires) x 3220 / 224 x 97 x 127
Wheelbase (mm) / (in)	2,850 / 121	2840 / 112
Front track (mm) / (in)	1,965 - 2,015 / 77 - 79	1780 / 70 - 1880 / 74 - 1970 / 78 - 2030 / 80
Rear track width (mm) / (in)	1,850 - 2,300 / 72 - 90	1800-2300 (2 rear tires) / 81-91 2330 (4 rear tires) / 92
Min. ground clearance (mm) / (in)	420 / 16	445 / 17.52
Minimum operating weight with cab (kg) / (lb)	6,600 / 14,550	7050 / 15,543 (2 rear tires) 7840 / 17,284 (4 rear tires)
Steering & Hitch		
Steering type	Full hydraulic steering on front wheels	Full hydraulic steering on front wheels
Hitch type / category	Rear-mounted three-point hitch, Category II and III	Rear-mounted three-point hitch, Category III
Tires		
Front tire specification	14.9-28	16.9-28
Rear tire specification	20.8-38	20.8-38
Optional Configuration		
Front ballast (kg) / (lb)	Max. 1120 / 2469.18 (optional)	Max. 600 / 1323 (optional)
Rear ballast (kg) / (lb)	Max. 360 / 793.66 (optional)	Max. 360 / 793.66 (optional)

With front and rear iron ballast (1480 kg), optional tires: (16.9R28/20.8R38)



**GROWER**®



**Legal Notice:**

The information contained in this catalog, including but not limited to technical specifications, descriptions, configurations, illustrations, images, performance data, capacities, and any other information, is provided for informational and reference purposes only. Such information may be modified, updated, or corrected at any time without prior notice.

**GROWER**® assumes no responsibility for any errors, omissions, or discrepancies between the information contained herein and the final product delivered.



*\*Equipment features, images, and specifications are subject to change without notice by **GROWER**®*

**Grower**®

**GROWER**®



# Range 240-440 HP

\*Equipment features, images, and specifications are subject to change without notice by **GROWER**®

## Technical Info

Transmission	GT 2404	GT 2804
Drive type	4WD / 4x4	4WD / 4x4
Gearbox gears number	F18 + R9	F27 + R9
Max. forward speed (km/h) / (mph)	36 / 22.3	36 / 22.3
Engine		
Engine brand	GROWER	GROWER
Engine model	SC7H240G3	GE-LD2804
Engine type	6-cylinder inline, water-cooled, four-stroke, direct injection, turbocharged, intercooler	
Engine Rated power (kW) / (hp)	177 / 237.36	206 / 280
Engine Rated speed (rpm)	2200	2200
Engine Displacement (L) / (cc)	9.7 / 9726	9.7 / 9726
Cylinder Bore (mm) / (in)	126 / 4.96	126 / 4.96
Piston Stroke (mm) / (in)	130 / 5.12	130 / 5.12
Fuel tank capacity (L) / (gal)	512 / 135	590 / 156
Traction & Force		
Max. traction force (kN / Lbf)	56.96 / 12,805.68	89 / 20,008
Max. lifting force (kg / lb)	42.28 / 9,504.92	74 / 16,636
PTO ( Power Take - Off )		
PTO power (kW / hp)	150.45 / 201.76	170 / 228
PTO type	Rear-mounted, independent	Rear-mounted, independent
PTO speed (rpm)	760/850 or 540/1000	760/850 or 540/1000
PTO shaft size	21 involute splines	1-3/4" (~44.4 mm) × 20 splines, option 1000 rpm.
Hydraulic System		
Number of hydraulic outlets	Three pairs	Four pairs
Draft control	Height control and float control	Electronic Draft Control with load detection system
Dimensions & Weights		
Dimensions L ×W ×H (height to top of safety frame) (mm) / (in)	5685 × 2470 (2 rear tires) × 3220 / 224×97×127 5685 × 3465 (4 rear tires) × 3220 / 224×97×127	5980 × 2946 × 3380 / 235 × 114 × 133
Wheelbase (mm) / (in)	2,840 / 112	3050 / 120
Front track (mm) / (in)	1780 / 70 – 1880 / 74 – 1970 / 78 – 2030 / 80	2160 / 85
Rear track width (mm) / (in)	1800–2300 (2 rear tires) / 81–91 2330 (4 rear tires) / 92	2236 / 88
Min. ground clearance (mm) / (in)	445 / 17.52	520 / 20
Minimum operating weight with cab (kg) / (lb)	7050 / 17,086 (2 rear tires) 7840 / 17,284 (4 rear tires)	11308 / 24,930
Steering & Hitch		
Steering type	Full hydraulic steering on front wheels	Power-assisted steering with closed-center system and electronic assistance.
Hitch type / category	Rear-mounted three-point hitch, Category III	Rear-mounted three-point linkage, Category III Option: Category 4N / 3
Tires		
Front tire specification	16.9–28	600 / 70R30
Rear tire specification	20.8–38	710 / 70R42
Optional Configuration		
Front ballast (kg) / (lb)	Max. 1120 / 2469.18 (optional)	Max. 1300 / 2866.18 (optional)
Rear ballast (kg) / (lb)	Max. 360 / 793.66 (optional)	Max. 900 / 1,984 (optional)

With front and rear iron ballast (1480 kg), optional tires: (16.9R28/20.8R38)

\*Equipment features, images, and specifications are subject to change without notice by **GROWER**®

## Technical Info

Transmission	GT 3004	GT 3604
Drive type	4WD / 4x4	4WD / 4x4
Gearbox gears number	F24 + R12	F24 + R12
Max. forward speed (km/h) / (mph)	36 / 22.3	36 / 22.3
Engine		
Engine brand	GROWER	GROWER
Engine model	GE-LD3004	GE-LD3604
Engine type	6-cylinder inline, water-cooled, four-stroke, direct injection, turbocharged, intercooler	
Engine Rated power (kW) / (hp)	221 / 300	265 / 360
Engine Rated speed (rpm)	2200	2100
Engine Displacement (L) / (cc)	9.7 / 9726	9.41 / 9410
Cylinder Bore (mm) / (in)	126 / 4.96	123 / 4.84
Piston Stroke (mm) / (in)	130 / 5.12	132 / 5.20
Fuel tank capacity (L) / (gal)	590 / 156	590 / 156
Traction & Force		
Max. traction force (kN / Lbf)	89 / 20,008	141 / 31,687
Max. lifting force (kg / lb)	74 / 16,636	52 / 11,685
PTO ( Power Take - Off )		
PTO power (kW / hp)	170 / 228	260–325 / 350–435
PTO type	Rear-mounted, independent	Rear-mounted, independent
PTO speed (rpm)	760/850 or 540/1000	760/850 or 540/1000
PTO shaft size	1-3/4" (≈44.4 mm) × 20 splines, option 1000 rpm.	1-3/4" × 20 splines, 1000 rpm heavy-duty
Hydraulic System		
Number of hydraulic outlets	Four pairs	6 electronic hydraulic outlets (SCVs)
Draft control	Electronic Draft Control with load detection system	Electronic Draft Control (EDC) with draft force sensors
Dimensions & Weights		
Dimensions L ×W×H (height to top of safety frame) (mm) / (in)	5980 × 2946 × 3380 / 235 × 114 × 133	8100 × 4290 × 4100 / 319 × 169 × 161
Wheelbase (mm) / (in)	3050 / 120	3911 / 154
Front track (mm) / (in)	2160 / 85	1,800 – 2,340 / 71 – 92
Rear track width (mm) / (in)	2236 / 88	2802 / 110 (Double tire)
Min. ground clearance (mm) / (in)	520 / 20	450 / 18
Minimum operating weight with cab (kg) / (lb)	11308 / 24,930	18,630 / 41,060
Steering & Hitch		
Steering type	Power-assisted steering with closed-center system and electronic assistance.	Electro-hydraulic, with advanced electronic assistance
Hitch type / category	Rear-mounted three-point linkage, Category III Option: Category 4N / 3	Rear-mounted three-point linkage, Category IV
Tires		
Front tire specification	600 / 70R30	600 / 70R30
Rear tire specification	710 / 70R42	710 / 70R42
Optional Configuration		
Front ballast (kg) / (lb)	Max. 1300 / 2866.18 (optional)	Max. 800 / 1,764 (optional)
Rear ballast (kg) / (lb)	Max. 900 / 1,984 (optional)	Max. 1000 / 2,204 (optional)

With front and rear iron ballast (1480 kg), optional tires: (16.9R28/20.8R38)

\*Equipment features, images, and specifications are subject to change without notice by **GROWER®**

## Technical Info

Transmission	GT 4004	GT 4404
Drive type	4WD / 4x4	4WD / 4x4
Gearbox gears number	F24 + R12	F24 + R12
Max. forward speed (km/h) / (mph)	36 / 22.3	36 / 22.3
Engine		
Engine brand	GROWER	GROWER
Engine model	GE-LD4004	GE-LD4404
Engine type	6-cylinder inline, water-cooled, four-stroke, direct injection, turbocharged, intercooler	
Engine Rated power (kW) / (hp)	299 / 400	323.5 / 440
Engine Rated speed (rpm)	2100	2100
Engine Displacement (L) / (cc)	9.41 / 9410	16.35 / 16 350
Cylinder Bore (mm) / (in)	123 / 4.84	145 / 5.71
Piston Stroke (mm) / (in)	132 / 5.20	165 / 6.50
Fuel tank capacity (L) / (gal)	590 / 156	590 / 156
Traction & Force		
Max. traction force (kN / Lbf)	141 / 31,687	141 / 31,687
Max. lifting force (kg / lb)	52 / 11,685	52 / 11,685
PTO ( Power Take - Off )		
PTO power (kW / hp)	260–325 / 350–435	260–325 / 350–435
PTO type	Rear-mounted, independent	Rear-mounted, independent
PTO speed (rpm)	760/850 or 540/1000	760/850 or 540/1000
PTO shaft size	1-3/4" x 20 splines, 1000 rpm heavy-duty	1-3/4" x 20 splines, 1000 rpm heavy-duty
Hydraulic System		
Number of hydraulic outlets	6 electronic hydraulic outlets (SCVs)	6 electronic hydraulic outlets (SCVs)
Draft control	Electronic Draft Control (EDC) with draft force sensors	Electronic Draft Control (EDC) with draft force sensors
Dimensions & Weights		
Dimensions L xW xH (height to top of safety frame) (mm) / (in)	8100 x 4290 x 4100 / 319 x 169 x 161	8100 x 4290 x 4100 / 319 x 169 x 161
Wheelbase (mm) / (in)	3911 / 154	3911 / 154
Front track (mm) / (in)	1,800 – 2,340 / 71 – 92	1,800 – 2,340 / 71 – 92
Rear track width (mm) / (in)	2802 / 110 (Double tire)	2802 / 110 (Double tire)
Min. ground clearance (mm) / (in)	450 / 18	450 / 18
Minimum operating weight with cab (kg) / (lb)	18,630 / 41,060	18,630 / 41,060
Steering & Hitch		
Steering type	Electro-hydraulic, with advanced electronic assistance	Electro-hydraulic, with advanced electronic assistance
Hitch type / category	Rear-mounted three-point linkage, Category IV	Rear-mounted three-point linkage, Category IV
Tires		
Front tire specification	600 / 70R30	650 / 70R30
Rear tire specification	710 / 70R42	650 / 70R42
Optional Configuration		
Front ballast (kg) / (lb)	Max. 800 / 1,764 (optional)	Max. 800 / 1,764 (optional)
Rear ballast (kg) / (lb)	Max. 1000 / 2,204 (optional)	Max. 1000 / 2,204 (optional)

With front and rear iron ballast (1480 kg), optional tires: (16.9R28/20.8R38)



**GROWER**®



**Legal Notice:**

The information contained in this catalog, including but not limited to technical specifications, descriptions, configurations, illustrations, images, performance data, capacities, and any other information, is provided for informational and reference purposes only. Such information may be modified, updated, or corrected at any time without prior notice.

**GROWER**® assumes no responsibility for any errors, omissions, or discrepancies between the information contained herein and the final product delivered.



*\*Equipment features, images, and specifications are subject to change without notice by **GROWER**®*



**GROWER**®

***Designed to  
adapt to all your  
agricultural needs.***



\*Equipment features, images, and specifications are subject to change without notice by **GROWER**®



***GROWER***®

[www.growertractor.com](http://www.growertractor.com)

 | ***GROWER***®