



GROWER®



Equipment features, images, and specifications are subject to change without notice by **GROWER®*

Range 25 – 50 HP
Range 55 – 80 HP

Range 90 – 120 HP
Range 130 – 160 HP

Range 180 – 220 HP
Range 240 – 440 HP

High Quality Components / Componentes de Alta Calidad



Equipment features, images, and specifications are subject to change without notice by **GROWER®*



GROWER®

Heavy-duty rear linkages / Conexiones Traseras de Trabajo Pesado



All models can be equipped with high performance rear hitch with high power output


Todos los modelos pueden equiparse con enganche trasero de alto rendimiento con salida de alta potencia

Equipment features, images, and specifications are subject to change without notice by **GROWER®*



GROWER®

All-day comfort / Confort todo el día

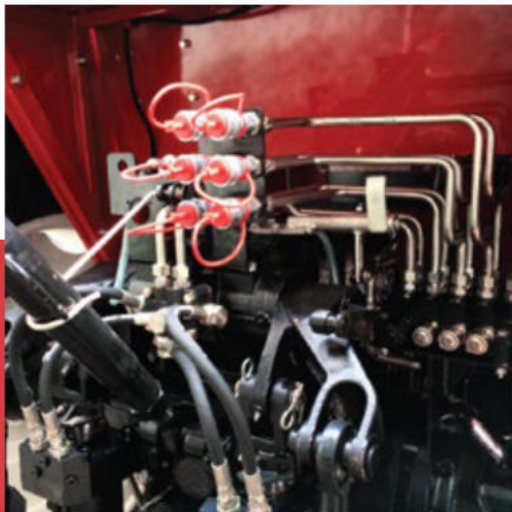

For feeding operations, mixer, baling hay or any other application, The PTO of Grower tractors can respond effectively to any need.

Para operaciones de siembra, mezcladoras, embalaje de heno o cualquier otra aplicación, el PTO de los tractores Grower puede responder de manera efectiva a cualquier necesidad.

The machine is spacious, fully equipped with good visibility, intuitive controls and a comfortable seat that puts you in a better position when hooking up to implements or tillage tools.

La cabina es espaciosa y está bien equipada, tiene buena visibilidad, controles intuitivos y un asiento cómodo que lo coloca en una mejor posición cuando se conecta a implementos o herramientas de labranza.



The high technology engine provides cleaner, quieter operation while delivering superior performance and durability.

El motor de alta tecnología proporciona un funcionamiento más limpio y silencioso a la vez que ofrece un rendimiento y durabilidad superiores.



Equipment features, images, and specifications are subject to change without notice by **GROWER®*



GROWER®



Technical Info

Transmission	GT 254	GT 354	GT 454	GT 504
Gearbox gears number	F8+R2	F8+R2	F8+R2	F8+R2
Max. forward speed (km/h) / (mph)	27.2 / 16.9	27.2 / 16.9	27.2 / 16.9	27.2 / 16.9
Engine				
Engine type	Inline, 4-stroke, water-cooled, Natural aspirated, 4 cylinders GT 504: Inline, 4-stroke, water-cooled, direct injection, turbocharged, intercooled, 4 cylinders			
Engine Rated power (kW) / (hp)	18.4 / 24.6	25.8 / 34.5	33.1 / 44.4	36.8 / 49.3
Engine Rated speed (rpm)	2350	2400	2400	2400
Engine Displacement (L) / (cc)	1.60 / 1600	2.24 / 2240	2.55 / 2550	2.9 / 2900
Traction & Force				
Max. traction force (kN / Lbf)	18,85 / 4237,65	18,85 / 4237,65	18,85 / 4237,65	18,85 / 4237,65
Max. lifting force (kg / lb)	725 / 1600	725 / 1600	725 / 1600	725 / 1600
PTO (Power Take - Off)				
PTO power (kW / hp)	34.38 / 46.1	34.38 / 46.1	34.38 / 46.1	34.38 / 46.1
PTO speed (rpm)	540/760 or 540/1000	540/760 or 540/1000	540/760 or 540/1000	540/760 or 540/1000
Dimensions & Weights				
Dimensions L xW xH (height to top of safety frame) (mm) / (in)	3,350 × 1,500 × 1,860 / 131 × 59 × 73	3,350 × 1,500 × 1,860 / 131 × 59 × 73	3,350 × 1,500 × 1,860 / 131 × 59 × 73	3790 × 1620 × 2130 / 149 × 63 × 83
Minimum operating weight with cab (kg) / (lb)	1,250 / 2,755	1,250 / 2,755	1,380 / 3,042	2,120 / 4,673
Tires				
Front tire specification	6.50-16	6.50-16	6.50-16	6.50-16
Rear tire specification	9.5-24	9.5-24	9.5-24	11.2-24

Optional Configuration: Cab with A/C, 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires 12.4×20 / 16.9×28 – 9.5×24 / 16.9×28 SET

Equipment features, images, and specifications are subject to change without notice by **GROWER®*



Technical Info

Transmission	GT 554	GT 604	GT 704	GT 804
Gearbox gears number	8 + 2	F12+R12	F12+R12	F12+R12
Max. forward speed (km/h) / (mph)	27.2 / 16.9	32.06 / 19.92	31.44 / 19.35	30.96 / 19.24
Engine				
Engine type	Inline, 4-stroke, water-cooled, direct injection, turbocharged, intercooled, 4 cylinders			
Engine Rated power (kW) / (hp)	40.5 / 54.3	44,1 / 59,14	51.5 / 69.06	59 / 79.12
Engine Rated speed (rpm)	2400	2400	2400	2400
Engine Displacement (L) / (cc)	3.3 / 3300	3.26 / 3260	3.567 / 3567	3.47 / 3470
Traction & Force				
Max. traction force (kN / Lbf)	18,85 / 4237,65	18,85 / 4237,65	18,85 / 4237,65	19.992 / 4494.38
Max. lifting force (kg / lb)	725 / 1600	9,92 / 2230,1	12.36 / 2779.76	14.16 / 3183.29
PTO (Power Take - Off)				
PTO power (kW / hp)	34.38 / 46.1	37,5 / 50,29	43.8 / 58.74	50.15 / 67.25
PTO speed (rpm)	540/760 or 540/1000	540/760 or 540/1000	540/760 or 540/1000	540/760 or 540/1000
Dimensions & Weights				
Dimensions L xW xH (height to top of safety frame) (mm) / (in)	3790 × 1620 × 2130 / 149 × 63 × 83	3925×1728×2870 / 154 × 68 × 113	3925×1728×2870 / 154 × 68 × 113	4530 × 2050 × 2930 / 178 × 80 × 115
Minimum operating weight with cab (kg) / (lb)	2120 / 4673	2565 / 5655	2565 / 5655	2720 / 5997
Tires				
Front tire specification	7.50-16	8.3-24	8.3-24	8.3-24
Rear tire specification	11.2-28	11-32	11-32	11-32

Optional Configuration: Cab with A/C, 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires 12.4×20 / 16.9×28 – 9.5×24 / 16.9×28 SET

Optional Configuration GT 804: Cab with A/C, 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires 12.4×24 / 18.4×30

Equipment features, images, and specifications are subject to change without notice by **GROWER®*



Technical Info

Transmission	GT 904	GT 1004	GT 1104	GT 1204
Gearbox gears number	F12+R12	F12+R12	F12+R12	F12+R12
Max. forward speed (km/h) / (mph)	32.26 / 20.05	32.26 / 20.11	32.26 / 20.11	32.26 / 20.11
Engine				
Engine type	Inline, 4-stroke, water-cooled, direct injection, turbocharged, intercooled, 4 cylinders			
Engine Rated power (kW) / (hp)	66.2 / 88.78	73.5 / 98.57	81 / 108	88.3 / 118.41z
Engine Rated speed (rpm)	2400	2400	2400	2400
Engine Displacement (L) / (cc)	3.47 / 3.470	3.47 / 3.470	3.47 / 3.470	3.47 / 3.470
Traction & Force				
Max. traction force (kN / Lbf)	20.727 / 4659.61	23.8875 / 5370.12	23.8875 / 5370.12	28.371 / 6378.05
Max. lifting force (kg / lb)	15.88 / 3569.97	17.64 / 3965.63	17.64 / 3965.63	21.192 / 4764.15
PTO (Power Take - Off)				
PTO power (kW / hp)	56.27 / 75.46	62.5 / 83.81	62.5 / 83.81	75 / 100.58
PTO speed (rpm)	540/760 or 540/1000	540/760 or 540/1000	540/760 or 540/1000	540/760 or 540/1000
Dimensions & Weights				
Dimensions L xW xH (height to top of safety frame) (mm) / (in)	4530 x 2050 x 2930 / 178 x 80 x 115	4530 x 2050 x 2930 / 178 x 80 x 115	4530 x 2050 x 2930 / 178 x 80 x 115	4530 x 2050 x 2930 / 178 x 80 x 115
Minimum operating weight with cab (kg) / (lb)	2820 / 6217	3250 / 7165	3250 / 7165	3860 / 8510
Tires				
Front tire specification	8.3-24	9,5-24	9,5-24	9,5-24
Rear tire specification	14.9-30	14.9-30	14.9-30	14.9-30

Optional Configuration: Cab with A/C, 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), **GT 904** optional tires 12.4x24 / 18.4x30. **GT 1004** optional tires 12.4x24 / 18.4x34 - 14.9x24 / 23.1x26. **GT 1104** optional tires 12.4x24 / 18.4x34 - 14.9x24 / 23.1x26. **GT 1204** optional tires 14.9x24 / 23.1x26 - 14.9x24 / 23.1x30

Equipment features, images, and specifications are subject to change without notice by **GROWER®*



Technical Info

Transmission	GT 1304	GT 1404	GT 1504	GT 1604
Gearbox gears number	F12+R12	F24+R8	F24+R8	F24+R8
Max. forward speed (km/h) / (mph)	38 / 24	38 / 24	38 / 24	38 / 24
Engine				
Engine type	GT 1304: Inline, 4-stroke, water-cooled, direct injection, turbocharged, intercooled, 4 cylinders. GT 1404 - GT 1504 - GT 1604: 6-cylinder inline, water-cooled, four-stroke, direct injection, turbocharged, intercooler.			
Engine Rated power (kW) / (hp)	95.6 / 128	103 / 138.13	110.3 / 148	117.7 / 157.84
Engine Rated speed (rpm)	2400	2300	2300	2200
Engine Displacement (L) / (cc)	4.4 / 4400	6.50 / 6,500	6.75 / 6750	6.75 / 6750
Traction & Force				
Max. traction force (kN / Lbf)	28.371 / 6378.05	35.6475 / 8014	35.6475 / 8014	38.514 / 8,658.29
Max. lifting force (kg / lb)	21.192 / 4764.15	24.72 / 5,557.28	401/884	28.248 / 6,350.4
PTO (Power Take - Off)				
PTO power (kW / hp)	75 / 100.58	87.55 / 117.41	87.55 / 117.41	100.045 / 134.16
PTO speed (rpm)	540/760 or 540/1000	540/760 or 540/1000	540/850 or 540/1000	540/850 or 540/1000
Dimensions & Weights				
Dimensions L xW xH (height to top of safety frame) (mm) / (in)	5,060 × 2,330 × 2,983 / 199 × 91 × 117	4740 × 2170 × 2990 / 187 × 85 × 118	5,060 × 2,345 × 2,940 / 199 × 92 × 115	5,060 × 2,345 × 2,940 / 199 × 92 × 115
Minimum operating weight with cab (kg) / (lb)	5,510 / 12,147	4850 / 10,692	5,700 / 12,566	5,700 / 12,566
Tires				
Front tire specification	9,5-24	13.6-24	13.6-24	14.9-26
Rear tire specification	14.9-30	16.9-34	16.9-34	16.9-38

Optional Configuration GT 1304: Cab with A/C, 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires 14.9×24 / 23.1×26 – 14.9×24 / 23.1×30

Optional Configuration GT 1404 - GT 1504 - GT 1604: With 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires (14.9×28 / 23.1×30)

Equipment features, images, and specifications are subject to change without notice by **GROWER®*



Technical Info

Transmission	GT 1804	GT 2004	GT 2104	GT 2204
Gearbox gears number	F24+R8	F24+R8	F24+R8	F18+R9
Max. forward speed (km/h) / (mph)	38 / 24	38 / 24	38 / 24	36 / 22.3
Engine				
Engine type	6-cylinder inline, water-cooled, four-stroke, direct injection, turbocharged, intercooler			
Engine Rated power (kW) / (hp)	132.4 / 177.55	147 / 197.13	154.4 / 207	162 / 217.25
Engine Rated speed (rpm)	2200	2200	2200	2200
Engine Displacement (L) / (cc)	6.75 / 6750	6.75 / 6750	6.75 / 6750	6.75 / 6750
Traction & Force				
Max. traction force (kN / Lbf)	42.63 / 9,583.61	51.82 / 11,649.04	51.82 / 11,649.04	51.82 / 11,649.04
Max. lifting force (kg / lb)	31.776 / 7,143.53	35.28 / 7,931.26	35.28 / 7,931.26	38.88 / 8,740.57
PTO (Power Take - Off)				
PTO power (kW / hp)	112.54 / 150.92	124.95 / 167.56	124.95 / 167.56	137.7 / 184.66
PTO speed (rpm)	760/850 or 540/1000	760/850 or 540/1000	760/850 or 540/1000	760/850 or 540/1000
Dimensions & Weights				
Dimensions L xW xH (height to top of safety frame) (mm) / (in)	5,340 × 2,938 × 3,180 / 210 × 94 × 125	5685 × 2470 (2 rear tires) × 3220 / 224 × 97 × 127 5685 × 3465 (4 rear tires) × 3220 / 224 × 97 × 127	5,000 × 2,750 × 3,200 / 236 × 97 × 130	5685 × 2470 (2 rear tires) × 3220 / 224 × 97 × 127 5685 × 3465 (4 rear tires) × 3220 / 224 × 97 × 127
Minimum operating weight with cab (kg) / (lb)	6,600 / 14,550	7050 / 15,543 (2 rear tires) 7840 / 17,284 (4 rear tires)	6,600 / 14,550	7050 / 15,543 (2 rear tires) 7840 / 17,284 (4 rear tires)
Tires				
Front tire specification	14.9–26	14.9–26	14.9–28	16.9–28
Rear tire specification	16.9–38	20.8–38	20.8–38	20.8–38

Optional Configuration GT 1804: With 3 pairs of hydraulic outlets, front & rear iron ballast (1480 kg), optional tires (14.9×28 / 23.1×30)

Optional Configuration GT 2004 – GT 2104 – GT 2204: With front and rear iron ballast (1480 kg), optional tires: (16.9R28 / 20.8R38)

*Equipment features, images, and specifications are subject to change without notice by **GROWER®**



Technical Info

Transmission	GT 2404	GT 2804	GT 3004
Gearbox gears number	F18+R9	F27+R9	F24+R12
Max. forward speed (km/h) / (mph)	36 / 22.3	36 / 22.3	36 / 22.3
Engine			
Engine type	6-cylinder inline, water-cooled, four-stroke, direct injection, turbocharged, intercooler		
Engine Rated power (kW) / (hp)	177 / 237.36	206 / 280	221 / 300
Engine Rated speed (rpm)	2200	2200	2200
Engine Displacement (L) / (cc)	9.7 / 9726	9.7 / 9726	9.7 / 9726
Traction & Force			
Max. traction force (kN / Lbf)	56.96 / 12,805.68	89 / 20,008	89 / 20,008
Max. lifting force (kg / lb)	42.28 / 9,504.92	74 / 16,636	74 / 16,636
PTO (Power Take - Off)			
PTO power (kW / hp)	150.45 / 201.76	170 / 228	170 / 228
PTO speed (rpm)	760/850 or 540/1000	760/850 or 540/1000	760/850 or 540/1000
Dimensions & Weights			
Dimensions L xW xH (height to top of safety frame) (mm) / (in)	5685 × 2470 (2 rear tires) × 3220 / 224 × 97 × 127 5685 × 3465 (4 rear tires) × 3220 / 224 × 97 × 127	5980 × 2946 × 3380 / 235 × 114 × 133	5980 × 2946 × 3380 / 235 × 114 × 133
Minimum operating weight with cab (kg) / (lb)	7050 / 17,086 (2 rear tires) 7840 / 17,284 (4 rear tires)	11308 / 24,930	11308 / 24,930
Tires			
Front tire specification	16.9–28	600 / 70R30	600 / 70R30
Rear tire specification	20.8–38	710 / 70R42	710 / 70R42

Optional Configuration: With 3 front and rear iron ballast (1480 kg), optional tires: (16.9R28 / 20.8R38)

Equipment features, images, and specifications are subject to change without notice by **GROWER®*



Technical Info

Transmission	GT 3604	GT 4004	GT 4404
Gearbox gears number	F24+R12	F24+R12	F24+R12
Max. forward speed (km/h) / (mph)	36 / 22.3	36 / 22.3	36 / 22.3
Engine			
Engine type	6-cylinder inline, water-cooled, four-stroke, direct injection, turbocharged, intercooler		
Engine Rated power (kW) / (hp)	265 / 360	299 / 400	323.5 / 440
Engine Rated speed (rpm)	2100	2100	2100
Engine Displacement (L) / (cc)	9.41 / 9410	9.41 / 9410	16.35 / 16 350
Traction & Force			
Max. traction force (kN / Lbf)	141 / 31,687	141 / 31,687	141 / 31,687
Max. lifting force (kg / lb)	52 / 11,685	52 / 11,685	52 / 11,685
PTO (Power Take - Off)			
PTO power (kW / hp)	260–325 / 350–435	260–325 / 350–435	260–325 / 350–435
PTO speed (rpm)	760/850 or 540/1000	760/850 or 540/1000	760/850 or 540/1000
Dimensions & Weights			
Dimensions L xW xH (height to top of safety frame) (mm) / (in)	8100 × 4290 × 4100 / 319 × 169 × 161	8100 × 4290 × 4100 / 319 × 169 × 161	8100 × 4290 × 4100 / 319 × 169 × 161
Minimum operating weight with cab (kg) / (lb)	18,630 / 41,060	18,630 / 41,060	18,630 / 41,060
Tires			
Front tire specification	600 / 70R30	600 / 70R30	650 / 70R30
Rear tire specification	710 / 70R42	710 / 70R42	550 / 70R42

Optional Configuration: With 3 front and rear iron ballast (1480 kg), optional tires: (16.9R28 / 20.8R38)

Equipment features, images, and specifications are subject to change without notice by **GROWER®*



FRONT END LOADER / PALAS CARGADORAS

	G554TK-QS	G754TK-QS	G1004TK-QS
Length / Longitud mm (ft)	2.630 (8,6)	2.890 (9,5)	3.000 (9,8)
Width / Ancho mm (ft)	1.670 (5,5)	1.830 (6,0)	2.100 (6,9)
Height / Alto mm (ft)	1.540 (5,1)	1.790 (5,9)	1.900 (6,2)
Bucket width / Ancho de Trabajo m (ft)	1,7 (5,5)	1,8 (6,0)	2,1 (6,9)
Bucket volume / Volumen de Balde m3 (cu.ft)	0,28 (9,9)	0,32 (11,3)	0,38 (13,4)
Load Capacity / Capacidad de Carga kg (lb)	600 (1.322)	800 (1.763)	1.200 (2.645)
Lifting height / Altura de Elevación m (ft)	2,7 (8,9)	2,9 (9,5)	3,2 (10,5)
Power required / Potencia Requerida cv (hp)	45- 55 (44,4 - 54,2)	60- 75 (59,2 - 73,9)	90- 100 (88,7 - 98,6)

ROTARY TILLER / ROTOCULTIVADORES



	G1GN-125	G1GN-140	G1GN-150
Working width / Ancho de Trabajo m (ft)	1,3 (4,1)	1,4 (4,6)	1,5 (4,9)
Working depth dry land / Profundidad de Trabajo campo seco cm (in)	8,0-14,0 (3,1-5,5)	8,0-14,0 (3,1-5,5)	8,0-14,0 (3,1-5,5)
Working depth paddy field / Profundidad de Trabajo Arrozal cm (in)	14,0-16,0(5,5-6,3)	14,0-16,0(5,5-6,3)	14,0-16,0(5,5-6,3)
Length / Longitud mm (ft)	900 (3,0)	900 (3,0)	900 (3,0)
Width / Ancho mm (ft)	1.360 (4,5)	1.690 (5,5)	1.700 (5,6)
Height / Alto mm (ft)	1.090 (3,6)	1.090 (3,6)	1.090 (3,6)
Weight / Peso kg (lb)	182 (401,2)	214 (471,8)	240 (529,1)
Productivity / Productividad ha/h (ac/h)	0,3-0,5 (0,6-0,9)	0,3-0,5 (0,6-0,9)	0,4-0,6 (0,7-1,1)
Matched Power / Potencia Requerida cv (hp)	18-30 (17,7-29,6)	20-30 (19,7-29,6)	25-30 (24,6-29,6)



MORE OPTIONS / MÁS OPCIONES



Trailers / Remolques



Disc Harrows / Gradas de discos



Plows / Arados



Seeders / Sembradoras

and more...

For more options please contact your nearest dealer.

Para más opciones, póngase en contacto con su distribuidor más cercano.

*Equipment features, images, and specifications are subject to change without notice by **GROWER®**

*Designed to
adapt to all your
agricultural needs.*



Legal Notice:

The information contained in this catalog, including but not limited to technical specifications, descriptions, configurations, illustrations, images, performance data, capacities, and any other information, is provided for informational and reference purposes only. Such information may be modified, updated, or corrected at any time without prior notice.

GROWER® assumes no responsibility for any errors, omissions, or discrepancies between the information contained herein and the final product delivered.

Equipment features, images, and specifications are subject to change without notice by **GROWER®*





GROWER®

www.growertractor.com



GROWER®